AQLU

CERAMIC

encourages you to

"Live It On"

AQLU
CERAMIC

"Art is born of the
observation
and investigation
of nature."

www.aqluceramica.com

AQLU
CERAMIC

About Us

AQLU ceramic is large scale of tiles manufacturer in india. Past 10 years we have been an established and popular company with an excellent track record for the best customer satisfaction. AQLU reflects your personality.

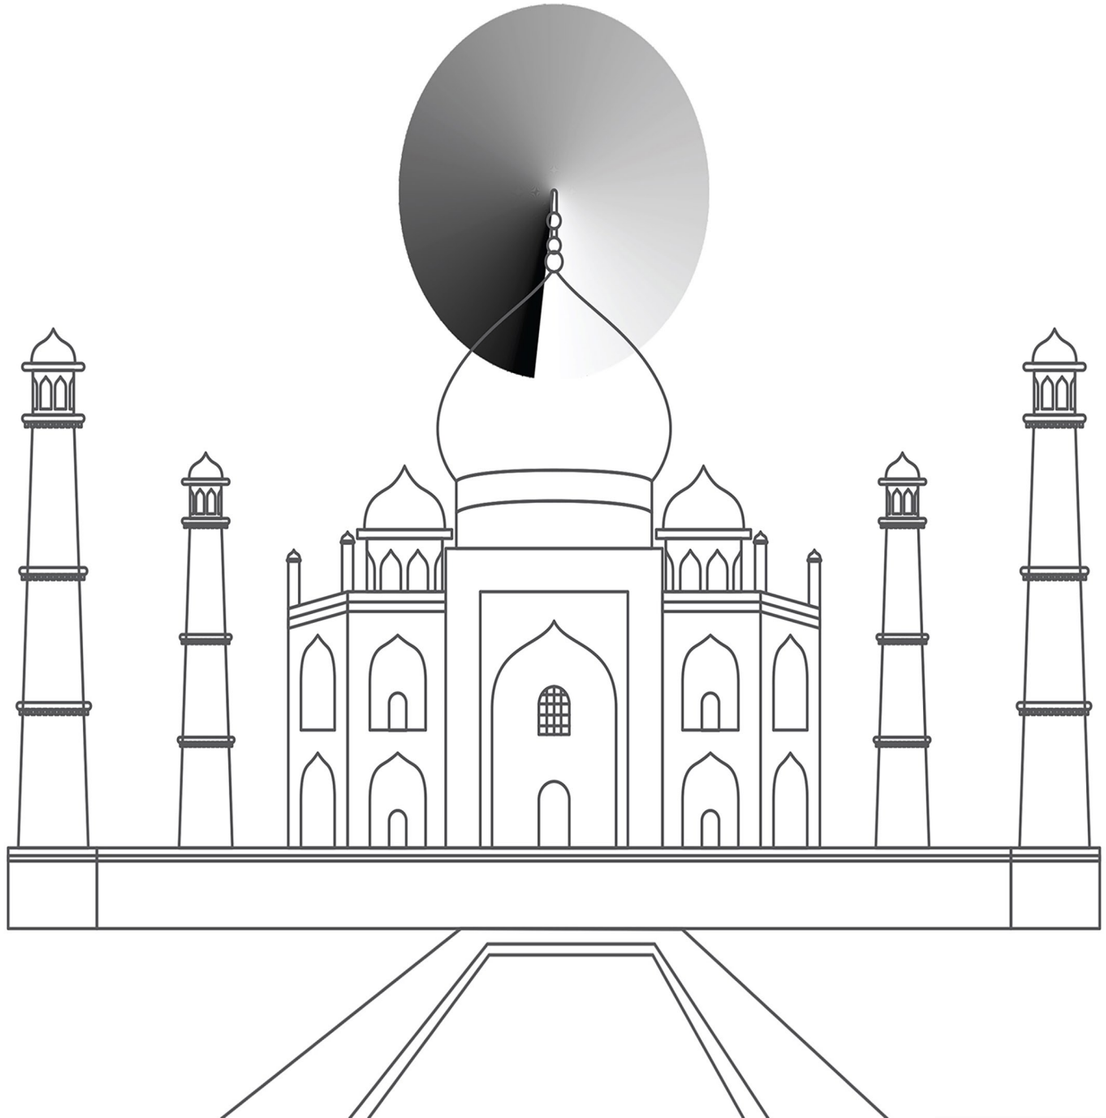

www.aqluceramica.com

THE EXPRESSIVE POWER OF WOOD

AQLU
CERAMIC

2 0 0

X 1 2 0 0

M M

www.aqluceramica.com

ANTICA BLACK

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

ANTICA COFFEE

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

ARTIC BEIGE

AQLU CERAMIC

Size
200x
1200mm

Randoms
4

PHASE-1

PHASE-2

PHASE-3

PHASE-4

PHASE-5

PHASE-6

BARK BROWN

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

BARK VERDE

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

CALDERA
WOOD BROWN

AQLU
CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

CALDERA WOOD GREY

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

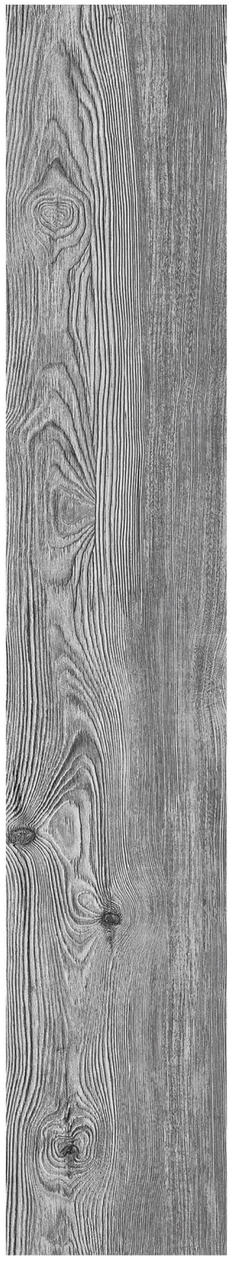

PHASE-2

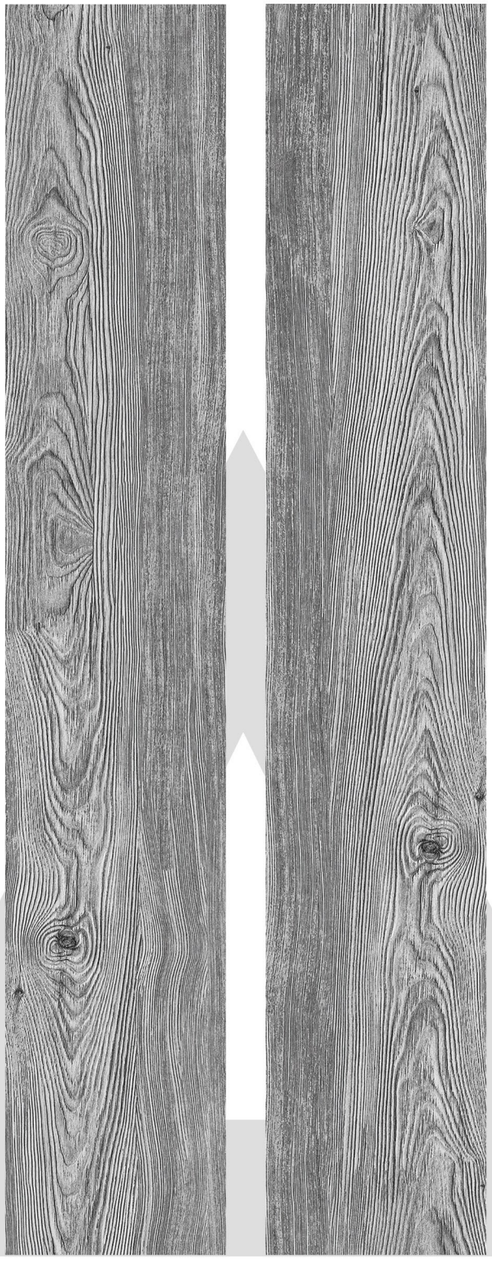

PHASE-3 PHASE-4

PHASE-5

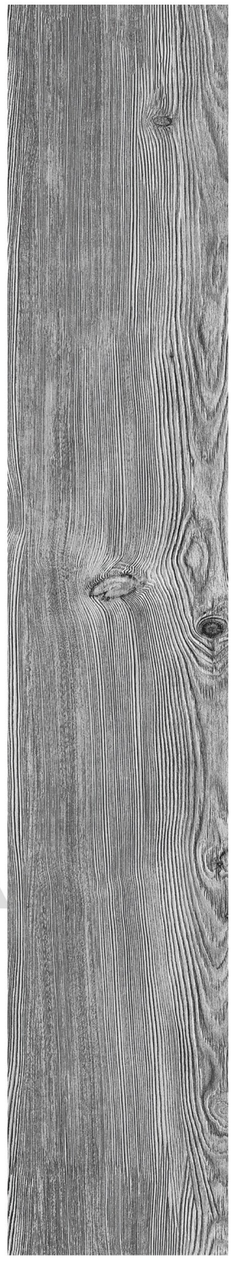

PHASE-6

LEMINA BROWN

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

LEMINA CREMA

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

PINE WOOD BEIGE

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

PINE WOOD BROWN

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

ROBLE WOOD

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

ROLLER WOOD BROWN

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3

PHASE-4

PHASE-5

PHASE-6

ROLLER WOOD GREY

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

ROVER BROWN

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

ROVER GREY

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

ROVER OAK

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

TAYRONA GREY

AQLU CERAMIC

Size
200x
1200mm

Randoms
4

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

TAYRONA RED

AQLU CERAMIC

Size
200x
1200mm

Randoms
4

PHASE-1

PHASE-2

PHASE-3

PHASE-4

PHASE-5

PHASE-6

TIMBER WOOD BEIGE

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

TIMBER WOOD BROWN

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

PHASE-3 PHASE-4

PHASE-5

PHASE-6

WORN WOOD BROWN

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

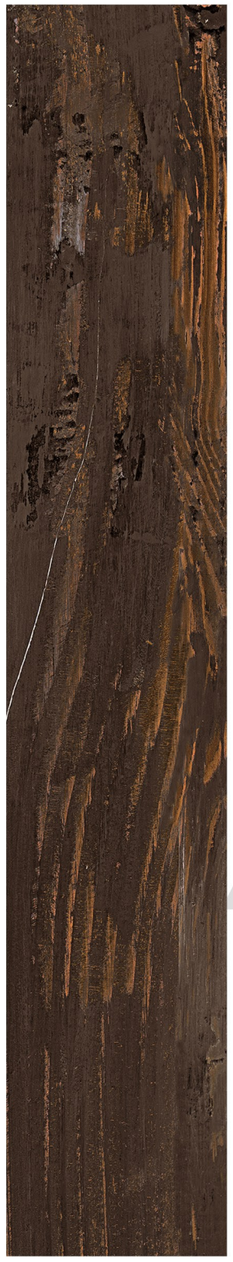

PHASE-3 PHASE-4

PHASE-5

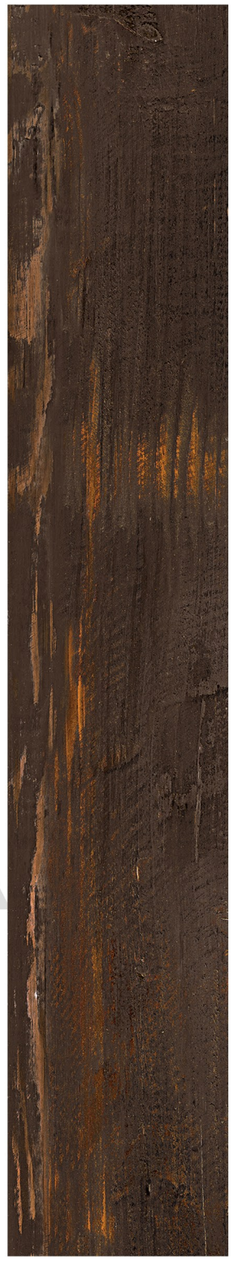

PHASE-6

WORN WOOD GREY

AQLU CERAMIC

Size
200x
1200mm

Randoms
6

PHASE-1

PHASE-2

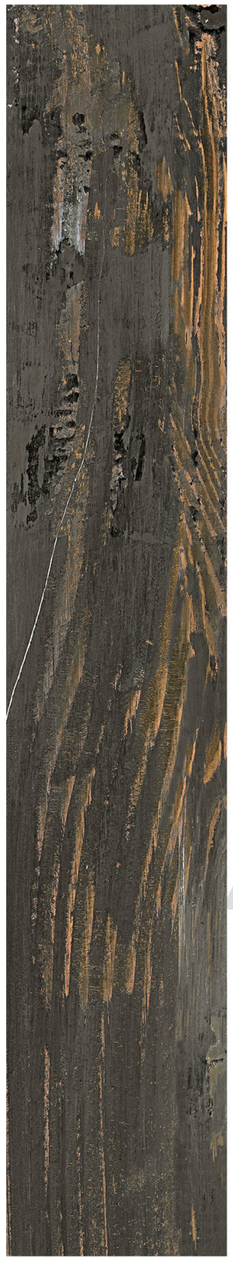

PHASE-3 PHASE-4

PHASE-5

PHASE-6

LAYING SOLUTIONS

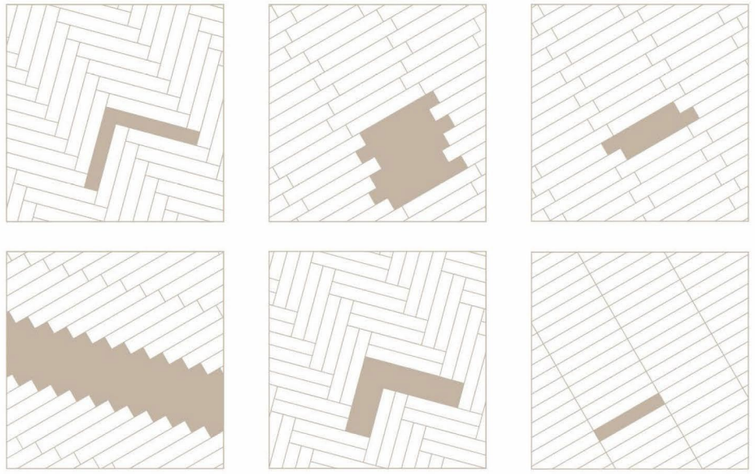

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group Bla, E ≤ 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VaLUES
			RECTIFIED	MATT
DIMENSIONS	Length and width	ISO 10545-2	± 0,3%, max 1 mm	In According
	Thickness		± 5%, max 0,5 mm	In According
	Wedging		± 0,3%, max 1,5 mm	In According
	Straightness of the edges		± 0,3%, max 0,8 mm	In According
	Flatness		± 0,4%, max 1,8 mm	In According
STRUCTURE	Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
	Breaking strength	ISO 10545-4	S≥ 1300 N	S≥ 2000 N
	Modulus of rupter		R≥ 35 N/mm²	In According
	Resistance to surface abrasion	ISO 10545-7	According to classification indicater by manufacture	PEI IV
THERMAL SHOCK	Coefficient of thermal linear expansion	ISO 10545-8	9 x 10^{-6} max	In According
	Thermal shock resistance	ISO 10545-9	Resistant	Resistant
	Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY	Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE	Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
	Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
	Stain resistance	ISO 10545-14	Min. class 3	5

AQLU CERAMIC

WOODS

INSTALLATION ADVICE

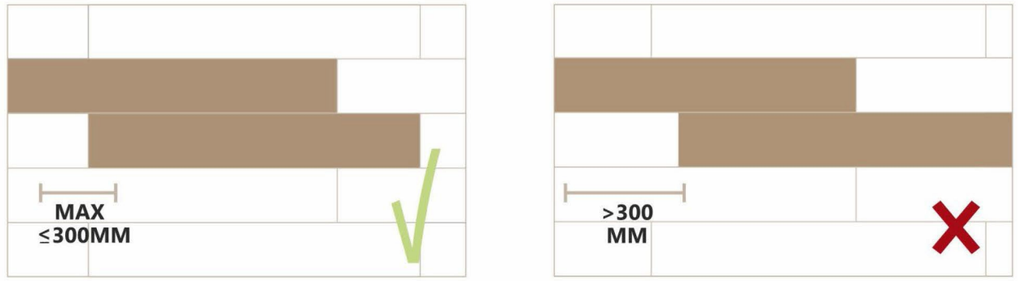

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES

The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES

*We need minimum 2000sq/mtr order for R11 surface

The best time company ever

AQLU
CERAMIC

+91 9638470770 | +91 7984015714
www.aqluceramica.com
aqluceramicllp@gmail.com