



**AOLU**  
CERAMIC

# Architecture CHOICE

[www.aqluceramica.com](http://www.aqluceramica.com)



# About Us


integrate the strategic objectives in their management and production systems in a transverse manner, so that the implementation of processes that are respectful towards the environment are not limited to specific actions, but instead from a part of its know how as a whole.

objective is to offer personalized and customized solutions for architecture and interior design through pieces which work as a complement for coverings and floorings. With high levels of aesthetic value, the ceramic pieces we manufacture achieve in adding extra value to projects thanks not only to their finishes, but also to their suitable adaptability with the rest of the elements.

This reflects in this catalogue which we have created with utmost creativity. The catalogue is one of the principal tools that still nowadays keep together the relationship between firms, resellers and consumers.

Once again following its own style, translates the trends and the innovations of the ceramic sector in something captivating and usable for the everyday design.



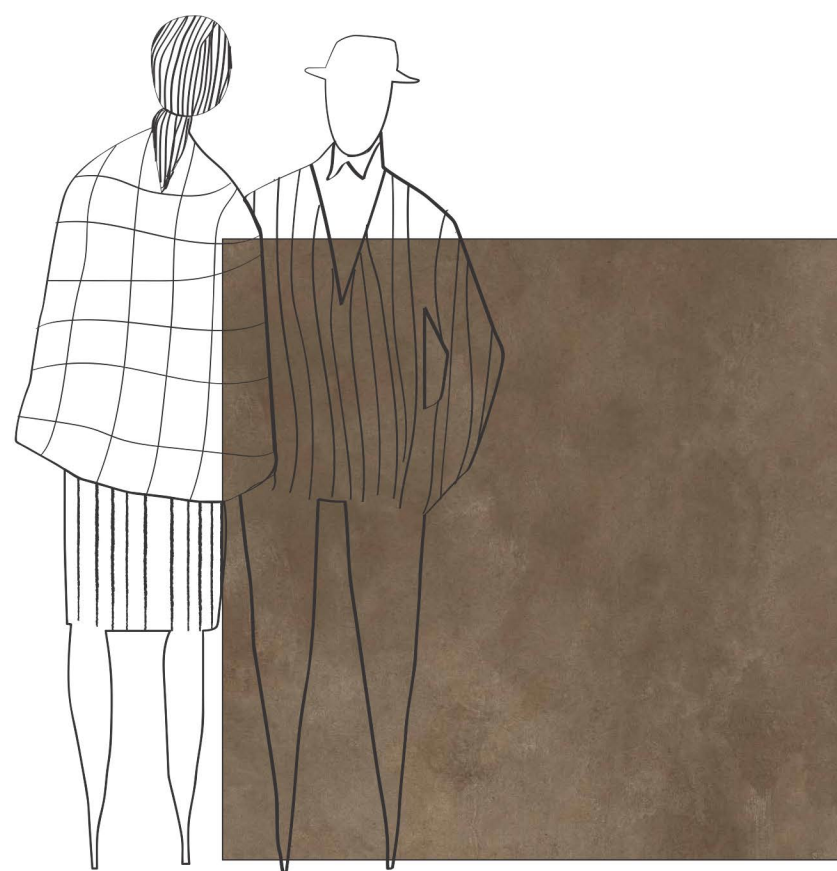

**1200x1200mm | 48x48" | 4x4ft**

A floor made of large tiles makes any room up-to-date. The minimum width grout joints are used beautifully that makes your surface consistent with the rectified edges & sure gives utter elegance.


[www.aqluceramica.com](http://www.aqluceramica.com)

1200x  
1200mm

48x48" | 4x4ft




## ALTIMO WHITE (BOOK MATCH)

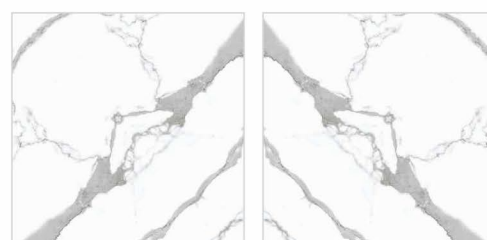

face A

face B

## ANTIQUE STATUARIO

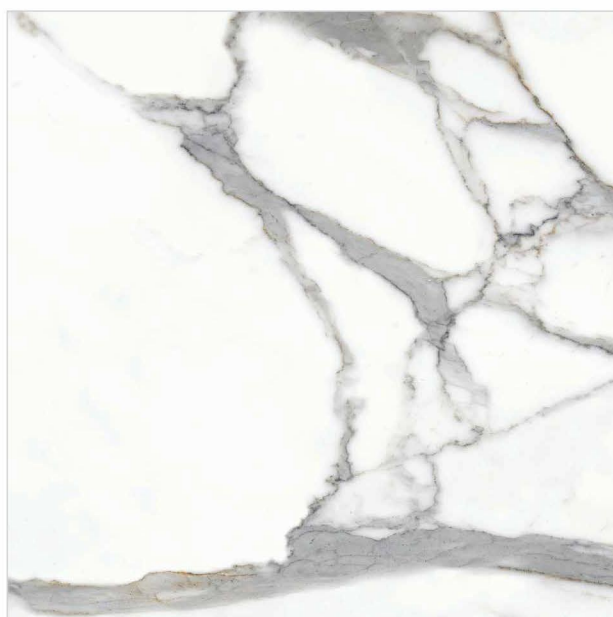

face 1

face 2

face 3

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness


—✚ 9mm thickness

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness



## ARMANI GOLD

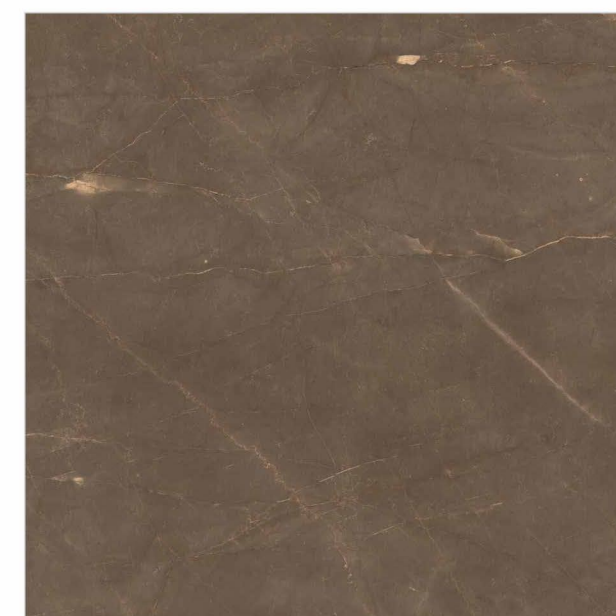

face 1

face 2

## ARMANI GREY

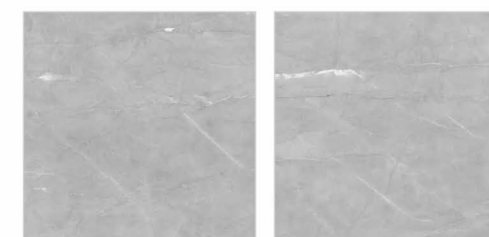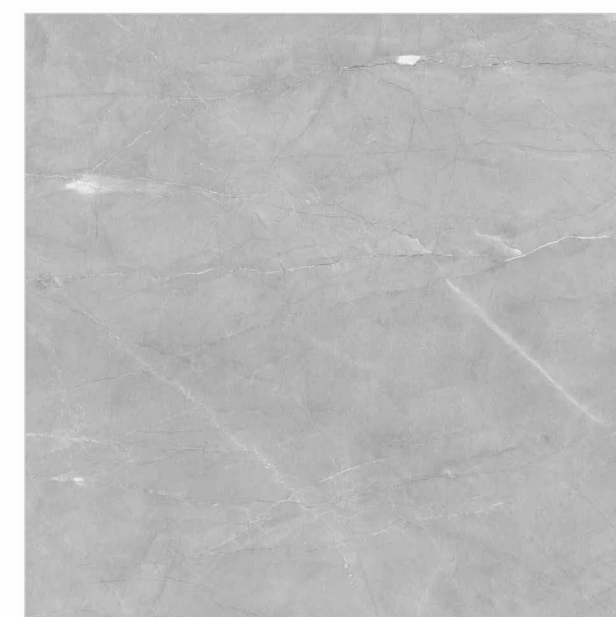


face 1



face 2



## ARCTIC WHITE

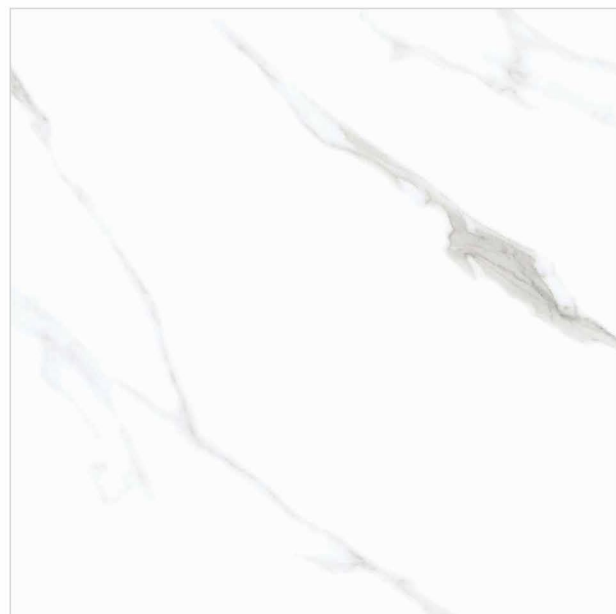

## ARCTIC WHITE (BOOKMATCH)

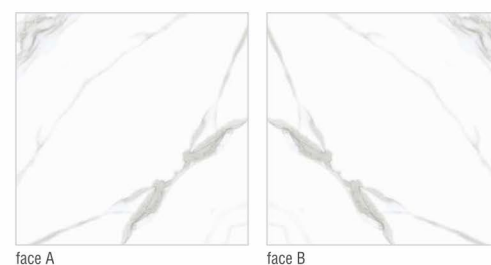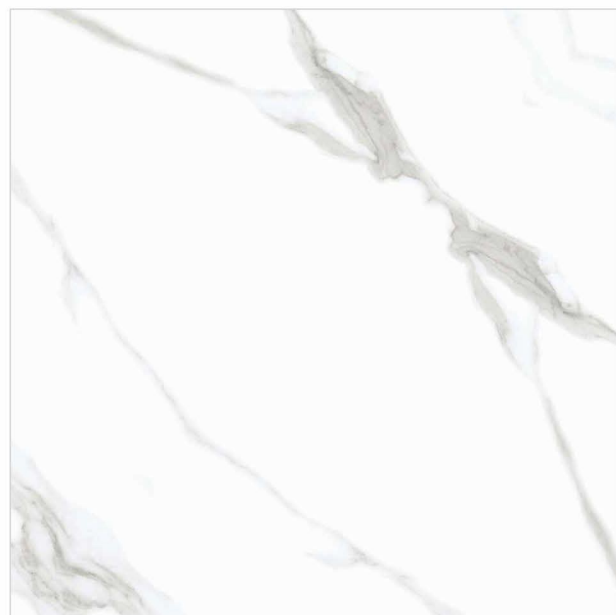

**GLOSSY  
FINISH** | 1200x1200mm

—✂— 6mm thickness

—✂— 9mm thickness

**GLOSSY  
FINISH** | 1200x1200mm



—✂— 6mm thickness

—✂— 9mm thickness

## ATLANTIC WHITE




## BIANCO DOLIMITI

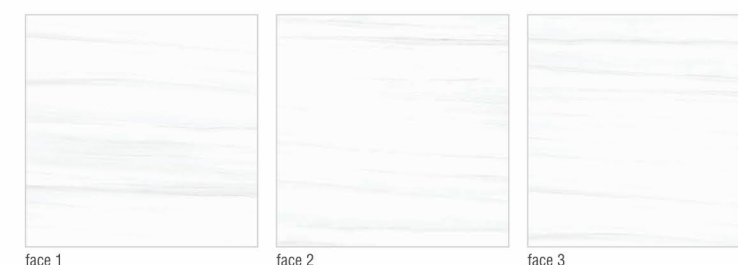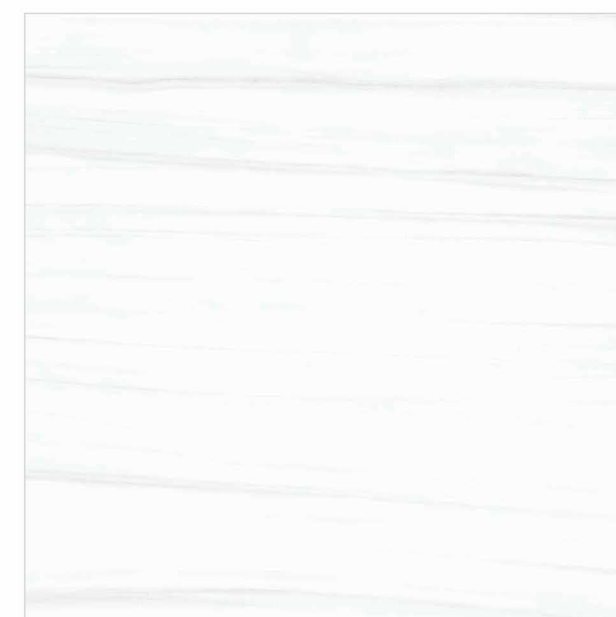



## BRECCIA CLASSIC

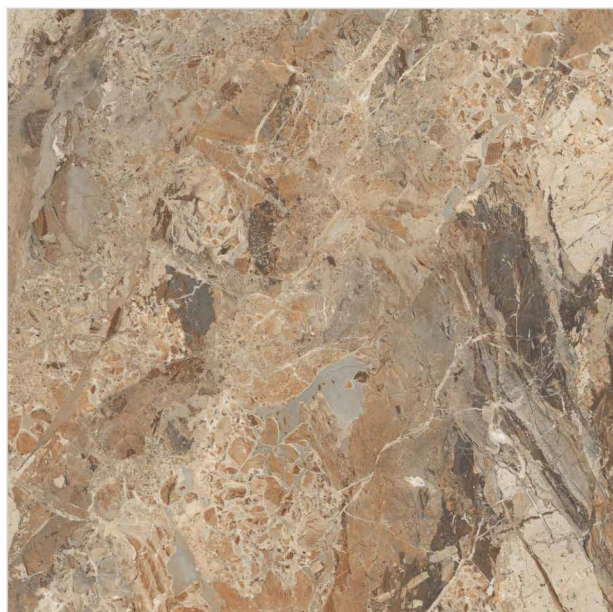

face 1




face 2



face 3

## BRECCIA LAVA

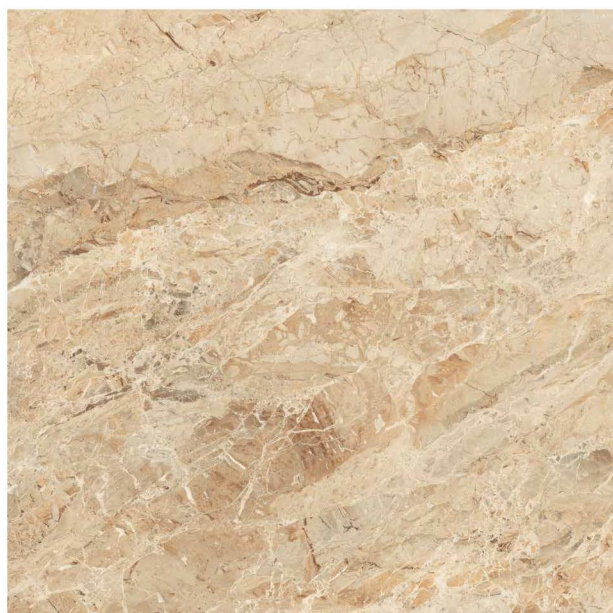

face 1



face 2

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness


—✚ 9mm thickness

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness

## BRECCIA AURORA BEIGE

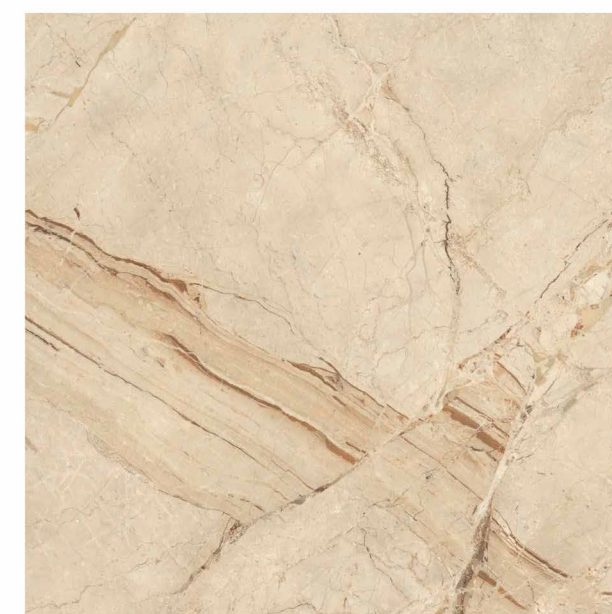


face 1



face 2

## BRECCIA BEIGE

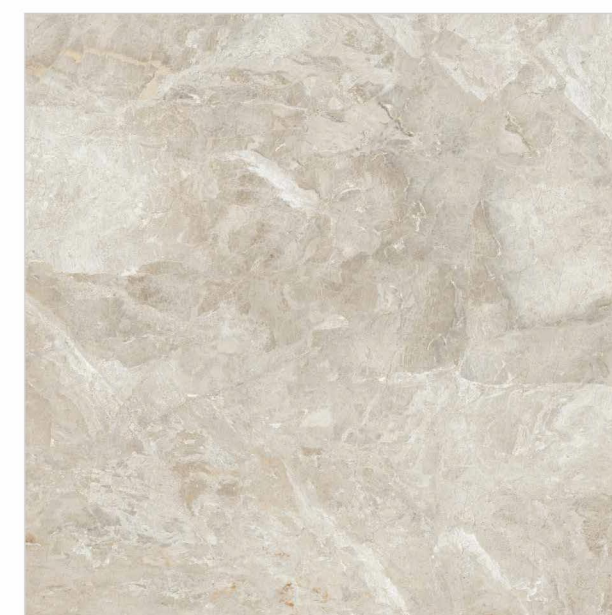

face 1



face 2






WALL  
NERO MARQUINA  
FLOOR  
BRECCIA AURORA BEIGE  
TABLE TOP  
BRECCIA AURORA BIANCO & NERO MARQUINA



## STOINIS NATURAL

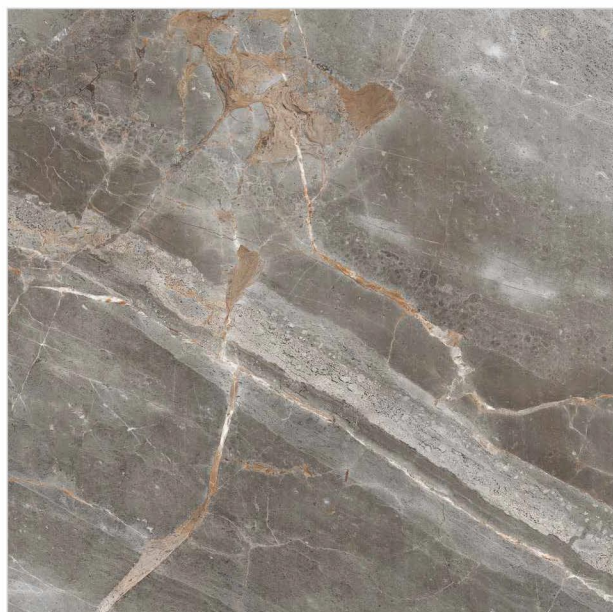

face 1




face 2



face 3

## MARINA PEDRA

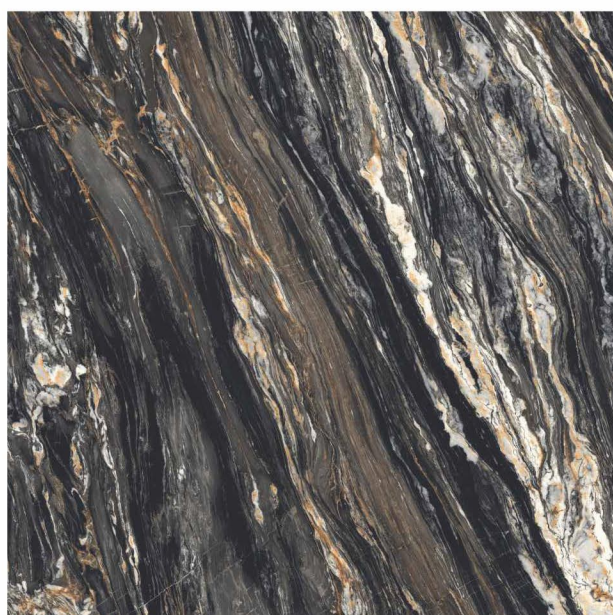

face 1



face 2



face 3

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness


—✚ 9mm thickness

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness

## COVELLANO LASA

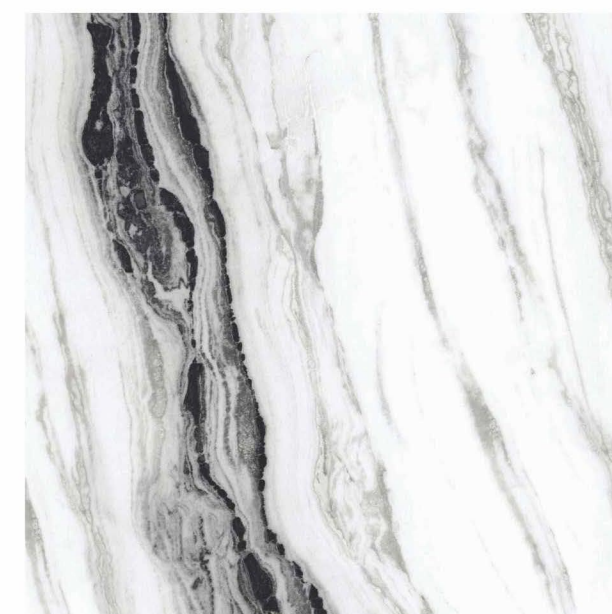

face 1




face 2




face 3

## CRISTAN STONE

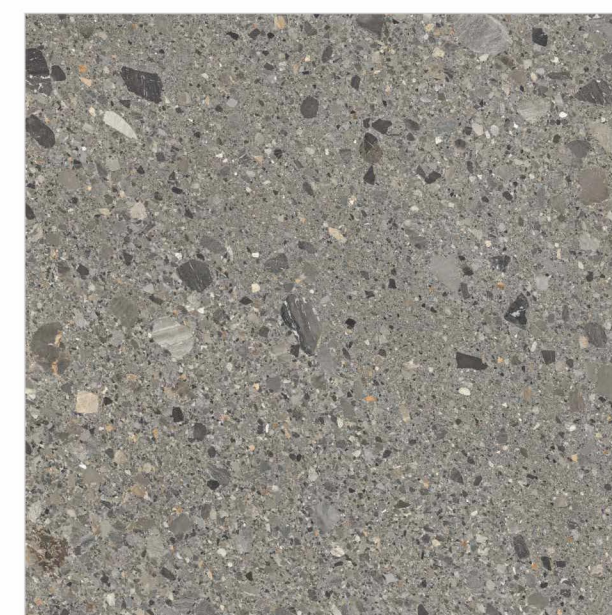

face 1




face 2



face 3



## DYNA SUPREME

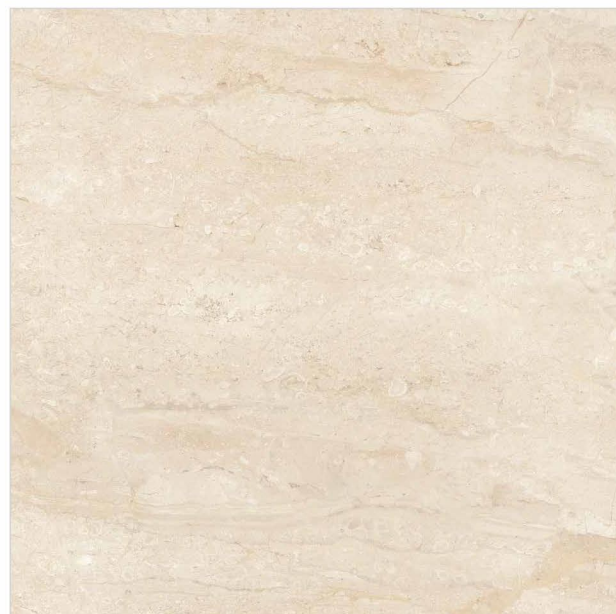

face 1




face 2



face 3

## FOREST BROWN

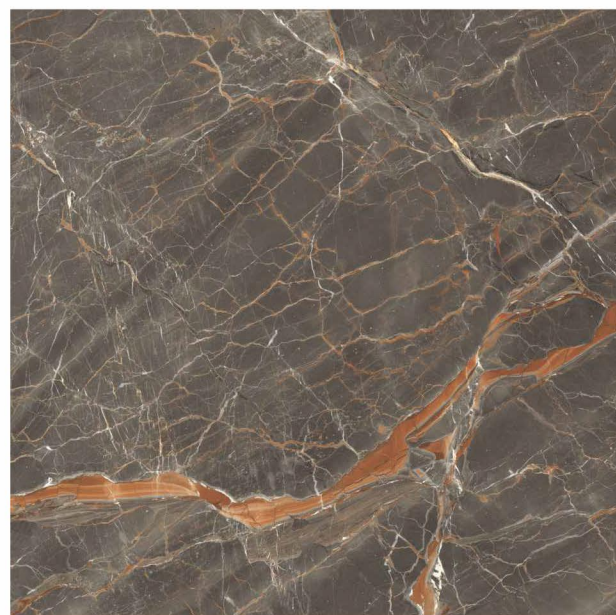

face 1



face 2



face 3

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness



—✚ 9mm thickness

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness


## GLORIOUS WHITE

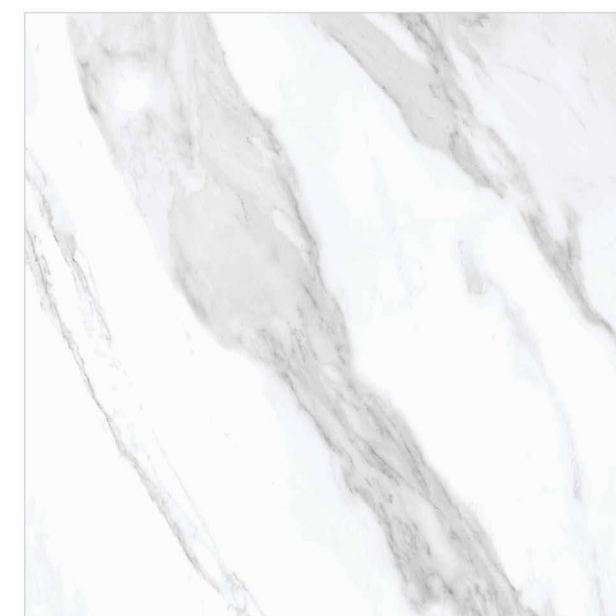

face 1




face 2



face 3

## IMPACT STATUARIO

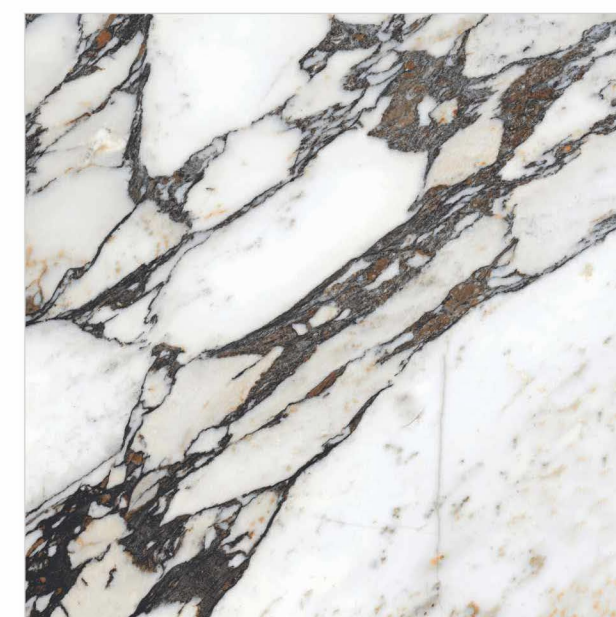

face 1



face 2



face 3



face 4





WALL & FLOOR  
IMPACT STATUARIO



## TRAVENTINO CREMA



face 1



face 2

## TRAVENTINO GOLD



face 1



face 2

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness

## MARIYAN BROWN (BOOKMATCH)



face A



face A

## NOCE MARRONE



face 1



face 2



## ONICE WHITE



face 1



face 2



face 3

## ONYX VANILA



face 1



face 2

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness


—✚ 9mm thickness

**GLOSSY  
FINISH** | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness

## PORCH WHITE

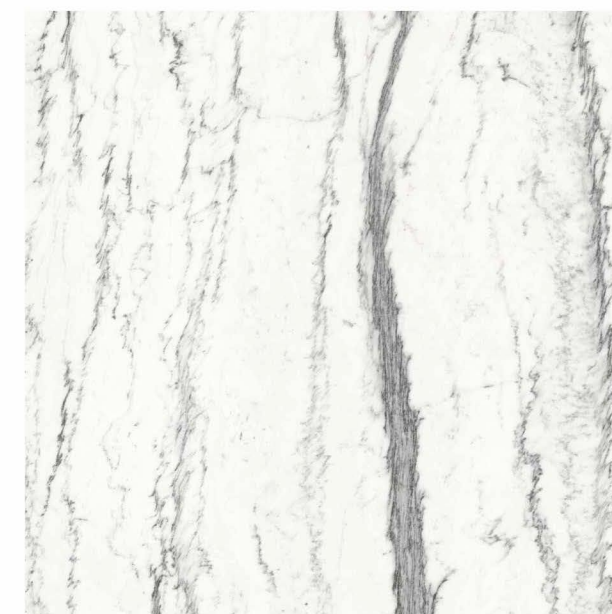

face 1




face 2



face 3

## PORTORO SILVER

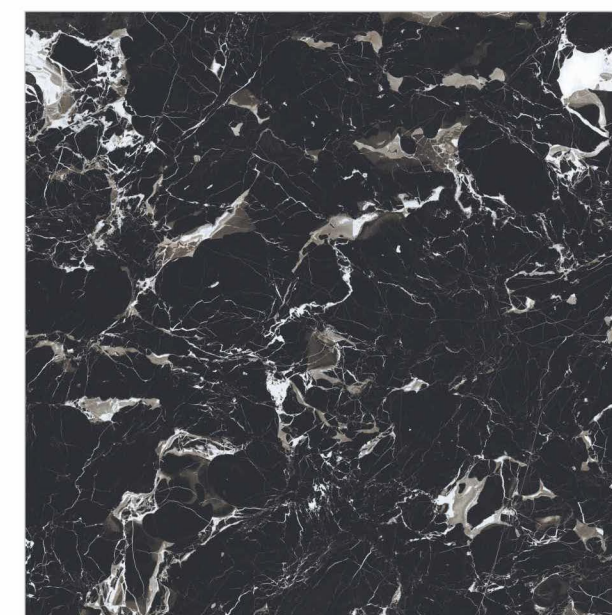

face 1



face 2



face 3



## TURKE LANA



face 1



face 2

## VANATO STATUARIO



face 1



face 2



face 3

**GLOSSY FINISH** | 1200x1200mm

✂ 6mm thickness

✂ 9mm thickness




**FLOOR**  
VANATO STATUARIO



## ALDO BEIGE



## ALDO SPHERE



**GLOSSY  
FINISH** | 1200x1200mm

— 6mm thickness

— 9mm thickness





## MADERA FOREST



face 1



face 2



face 3

## TRAVENTINO BEIGE



face 1



face 2

## GLOSSY FINISH | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness

## MATT+ GLOSSY | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness

## BALSA BEIGE




face 1



face 2

## DESERT IRONWOOD

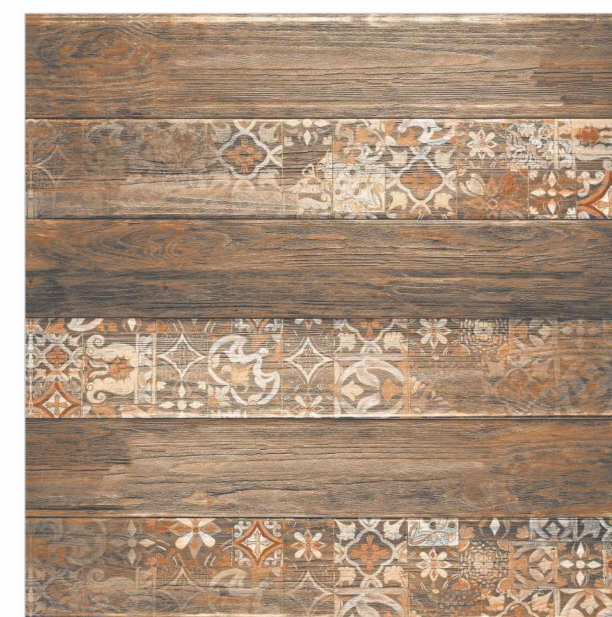

face 1



face 2



## OREGON BEIGE




face 1



face 2

## AMMONITE NERO

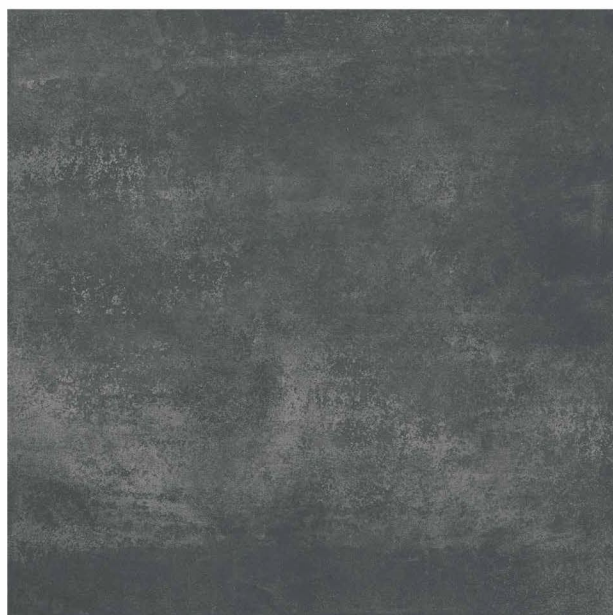

face 1



face 2



face 3

**MATT+  
GLOSSY** | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness

**MATT+  
GLOSSY** | 1200x1200mm

—✚ 6mm thickness

—✚ 9mm thickness

## AMMONITE BIANCO



face 1



face 2



face 3

## OREGON NATURAL





face 2




face 1



**FEBRICO CREMA**

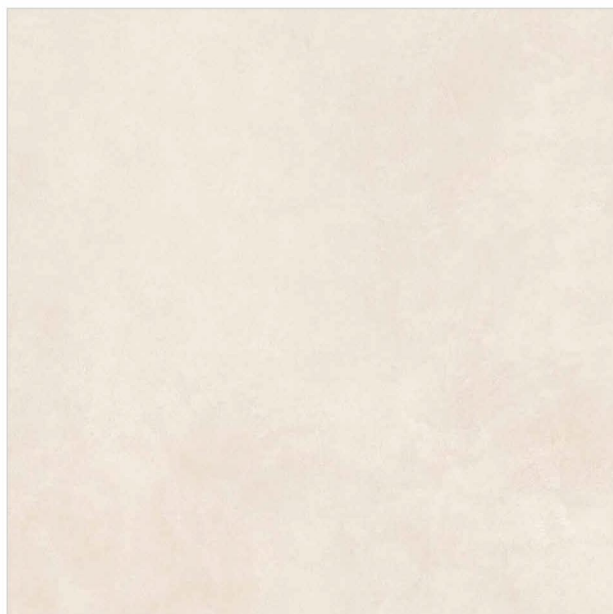


face 1



face 2

**FEBRICO BROWN**

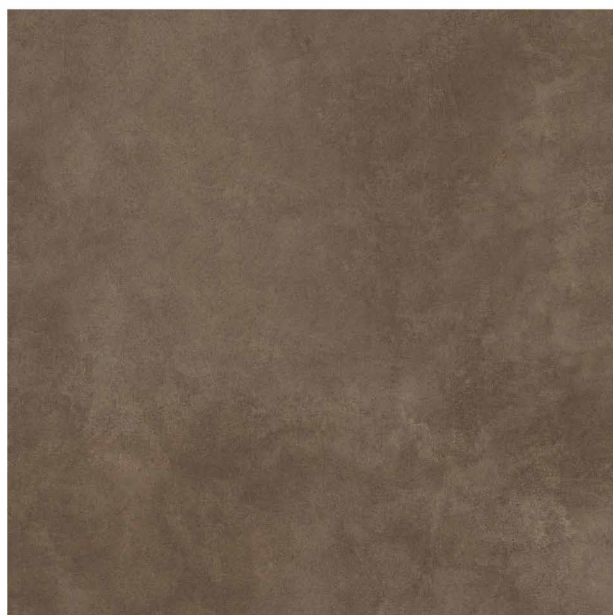

face 1



face 2

**MATT+  
GLOSSY** | 1200x1200mm

—✂— 6mm thickness


—✂— 9mm thickness

**MATT+  
GLOSSY** | 1200x1200mm

—✂— 6mm thickness

—✂— 9mm thickness

**CASPIAN WHITE**



face 1



face 2

**GRAFITO GREY**



face 1



face 2



## GRAFITO GRIS



face 1



face 2

## GRAFITO NATURAL



face 1



face 2

**MATT+  
GLOSSY** | 1200x1200mm

—✂— 6mm thickness


—✂— 9mm thickness

**MATT+  
GLOSSY** | 1200x1200mm


—✂— 6mm thickness

—✂— 9mm thickness

## ROCKFORD NATURAL

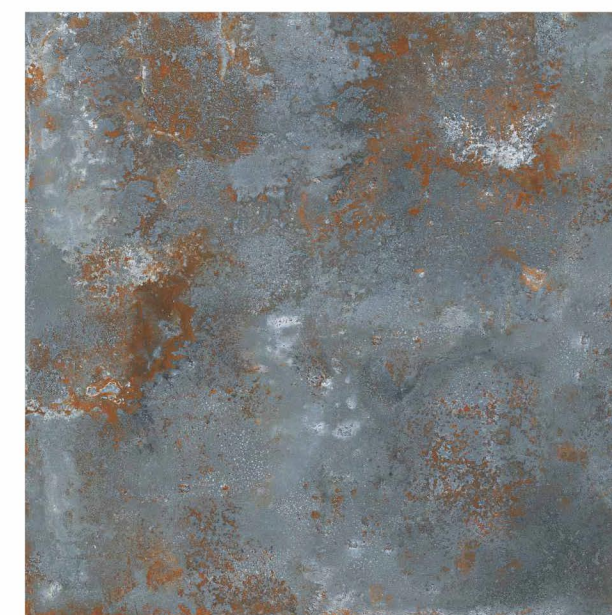

face 1



face 2



**PLAIN  
RUSTIC** | 1200x1200mm

— 6mm thickness

— 9mm thickness

**SANDUNE CAFE**



face 1



face 2



face 3



**FLOOR**  
SANDUNE CAFE



**PLAIN  
RUSTIC** | 1200x1200mm

✚ 6mm thickness

✚ 9mm thickness

**SENTILIA CREMA**




face 1



face 2

**SENTILIA BROWN**

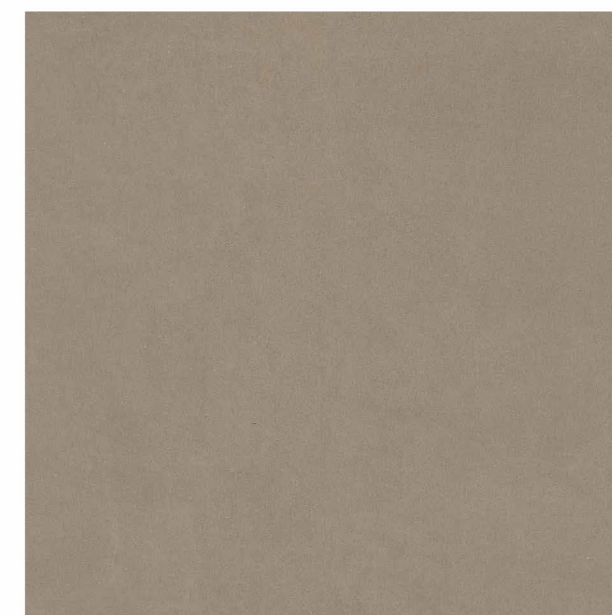

face 1




face 2

**WALL**  
SENTILIA CREMA  
**FLOOR**  
SENTILIA BROWN



## TUNA ROCK ICE

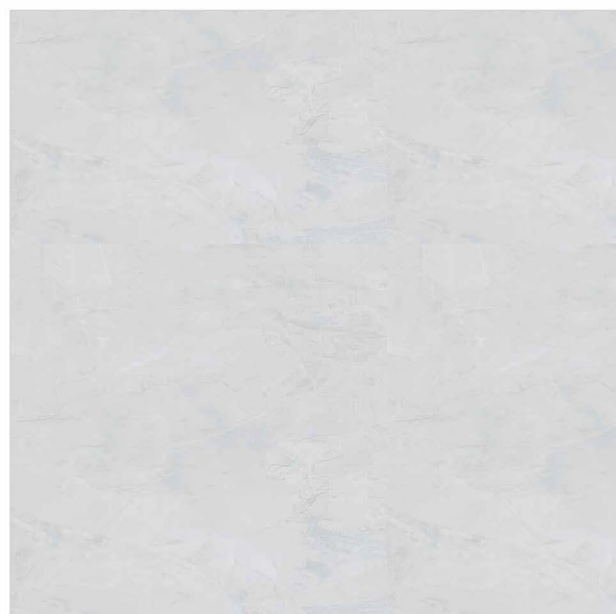

face 1



face 2



face 3

## TUNA ROCK GREY



face 1



face 2



face 3

**PLAIN  
RUSTIC** | 1200x1200mm

—✚ 6mm thickness


—✚ 9mm thickness

**PLAIN  
RUSTIC** | 1200x1200mm


—✚ 6mm thickness

—✚ 9mm thickness

## BASIL GRAFITO

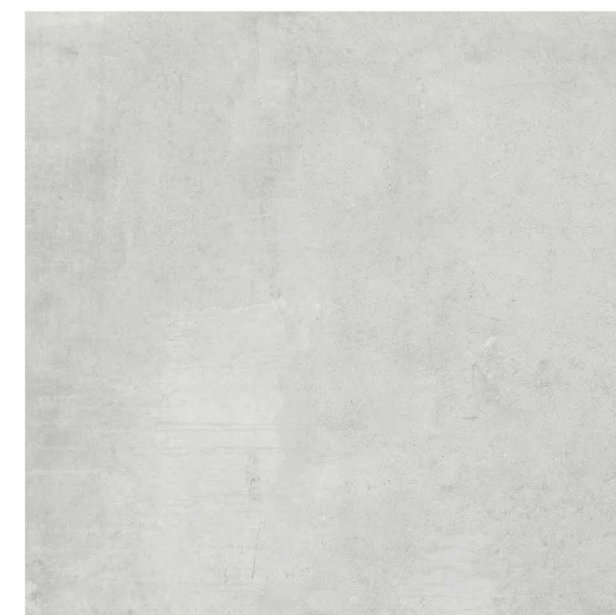

face 1



face 2



face 3



face 4



## SENTILIA GRIS



face 1



face 2

## SENTILIA ICE



face 1



face 2

**PLAIN** | 1200x1200mm  
**RUSTIC**

— 6mm thickness

— 9mm thickness



**FLOOR**  
SENTILIA ICE & SENTILIA GRIS



TECHNICAL SPECIFICATION OF SLAB VITRIFIED TILE

TEST DISCRPTION			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	VALUE
Deviation in Length	Is-13630-1	±0.10%	±0.05%
Deviation in Width	Is-13630-1	±0.10%	±0.05%
Deviation in Thickness	Is-13630-1	±5.0%	±3.00%
Straightness of Sides	Is-13630-1	±0.10%	±0.10%
Rectangularity	Is-13630-1	±0.10%	±0.10%
Surface Flatness	Is-13630-1	±0.50%	±0.2%
Surface Quality	Is-13630-1	Min. 95%	Min. 95%

PHYSICAL PROPERTIES			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	VALUE
Water Absorption	Is-13630-2	≥0.08% Avg.	0.04% Avg.(±0.02%)
Modulus of Rapture(N/mm2)	Is-13630-6	Avg. 35N/mm²	Avg. 42N/mm²
Breaking Strength(N)	Is-13630-6	<7.5mm-700n ≥7.5mm-1300n	<6mm-1200n ≥6mm-1350n
Moisture Expansion(mm/m)	Is-13630-3	0.02 Max	0.01 Max
Scratch Hardness of Surface	Is-13630-13	8 Min	4-4.5
Resistance of Surface Abrasion(Glazed Tiles)	Is-13630-11	Class II Min.	Class II Min.
Co-Efficent of Linear Thermal Expansion	Is-13630-4	6x10 <sup>⁶</sup> Max	6.5x10 <sup>⁶</sup> Max.
Thermal Shock Resistance	Is-13630-5	10 Cycles Min.	10 Cycles, Pass
Crazing Resistance	Is-13630-9	4 Cycles at 7.5 Bar Min.	5 Cycles at 7.5kg Pressure
Impact Resistance-Coefficient of Restitution	Is-13630-14	0.55 Min.	0.55 Min
Frost Resistance	Is-13630-10	According to Manufacturing Process	No Damage
Bulk Density (g/cc)	Is-13630-2	2.2 Min.	2.3

CHEMICAL PROPERTIES			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	VALUE
Resistance of Staining	Is-13630-8	Class I Min.	ClassII
Resistance of Household Chemicals	Is-13630-8	Class AA Min.	Class AA
Resistance to Acids & Alkalis	Is-13630-8	According to Manufacturing Process	Resistance
Slip Resistance	150-13006/EN1444 Group BIA	As pr Mfg.	>0.40

PACKING DETAIL

No.	Size	Thickness (approx.)	Pieces/Box	Area/Box	Wt./Box(approx.)
01	1200x2400mm	9.0mm	1 pcs.	2.88 sq. mtr.	60 Kgs.
02	800x2400mm	9.0mm	2 pcs.	3.84 sq. mtr.	80 Kgs.
03	900x1800mm	9.0mm	2 pcs.	3.24 sq. mtr.	65 Kgs.
04	800x1600mm	9.0mm	2 pcs.	2.56 sq. mtr.	54 Kgs.
05	1200x1200mm	9.0mm	2 pcs.	2.88 sq. mtr.	60 Kgs.

SLAB LAYING INSTRUCTIONS

- Plaster the surface of the floor to be tiled smooth and complete the plastering and curing at least two hour prior to tiling.

- Before fixing **SLAB**, lay them out in desired pattern and make sure that give acceptable blend of colour. Please not that certain amount of shade variation is inherent in the manufacture of a fully vitrified ceramic tile.  
THE COMPANY WALL BEAR NO LIABILITY AFTER THE TILES ARE FIXED.
- For fixing **SLAB**, we recommend the use of the tile fixing adhesive for best result. Also follow the tile fixing instructions provided along with adhesives.


- For fixing **SLAB** on the floor using sand and cement follow the instructions given bellow:
  - Use cement and sand mortar in the ratio of 1:4 add some water to create a consistent paste.
  - Once the mixing has been completed do not add any further water to create a consistent paste.
  - Apply a 20-30mm layer of bedding material over an area of 1 square meter at a time on the surface of the area. Apply a fine slurry to the back of the tile to ensure proper and dull bedding. press gently for even adherence at the back of the tile.  
DO NOT USE IRON HAMMER OR SOME HEAVY MATERIAL TO PRESS THE TILES.
- For fixing **SLAB** on dado, we recommend the use of adhesive. Please follow the manufacture's instructions for the same. We do not recommend the use of sand and cement for fixing on dado.

- Mark and layout the tiles from the center of the area to be tile so that cut tiles. If any will be on the outer edges to words the walls.


- The work size which we try to maintain for better technical performance is 1200x2400mm, 800x2400mm,900x1800mm, 800x1600mm, & 1200x1200mm on average. it is advisable to maintain a gap of 1mm to 3mm between every two tile to allow for possible expansion as per BIS/EN tolerance norms. This would give the coverage area as mentioned in the cartoon.
- Complete the tile laying process by pressing the center of the **SLAB** firmly into place along the walls/floors.
- Allow 3-4 days for bed curing. After this period fill the joints with grouts.
- Fifteen minutes after finishing the grouting process, wipe off excess grout with a damp sponge and polish the tile with a soft and dry cloth for a clean surface. The tile can also be cleaned by mild acid(however hydrofluoric acid and its derivatives should not be used)
- Please note that the company does not accept any liability in case of problems arising out of non-adherence to these fixing instructions.

TILING POSSIBILITIES

800X1600MM

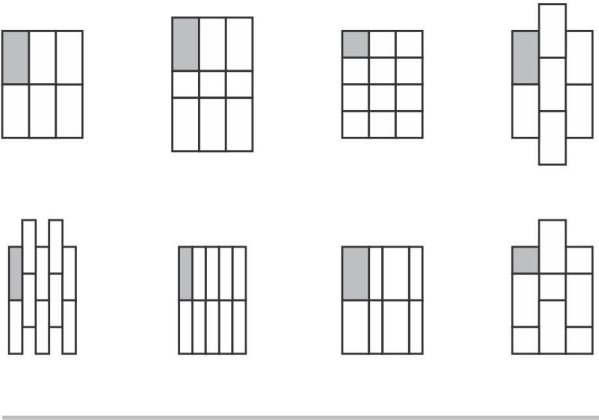

1200X1200MM

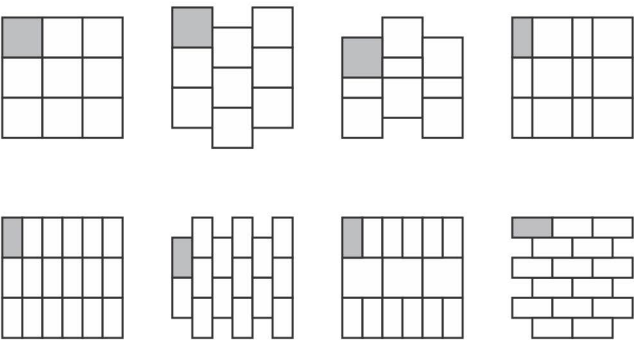



## OUR PRESENCE IN MORE THEN 65+ COUNTRIES

We always ensure that our buyers get the full value of their money once they place order with us. We always adhere to the delivery schedule stipulated in the contracts and ship the goods timely to our buyers, We closely examine the entire product development & carefully monitor the production process and only after the products go through the multiple quality assurance tests, we consider them ready for delivery. We ensure that each product perfectly meets the specifications required by our buyers

# export



warehouse

-  Amman City , Jordan
-  Misurata City , Libya
-  Basra City , Iraq
-  Dubai , United Arab Emirates
-  Beirut , Lebanon
-  Nouakchott , Mauritania

*The best time*  
**company ever**



**AQLU**  
CERAMIC

+91 9638470770 | +91 7984015714  
www.aqluceramica.com  
aqlucericamilp@gmail.com